


AV-0805-C-05DBNx

Temperature	N1	N2	N3	N4	N5	N6	N7	N8	N9
-40°C	8.75	7.37	6.44	5.85	5.68	5.52	5.34	5.22	N/A
-35°C	8.52	7.26	6.38	5.82	5.66	5.50	5.33	5.21	N/A
-30°C	8.27	7.13	6.32	5.79	5.63	5.48	5.31	5.20	N/A
-25°C	7.99	6.98	6.24	5.75	5.60	5.46	5.30	5.19	N/A
-20°C	7.70	6.82	6.16	5.70	5.56	5.43	5.28	5.18	N/A
-15°C	7.40	6.65	6.06	5.65	5.52	5.40	5.27	5.17	N/A
-10°C	7.09	6.46	5.96	5.59	5.48	5.37	5.24	5.16	N/A
-5°C	6.77	6.27	5.84	5.53	5.43	5.33	5.22	5.14	N/A
0°C	6.46	6.06	5.72	5.45	5.37	5.29	5.19	5.12	N/A
5°C	6.15	5.85	5.58	5.37	5.31	5.24	5.16	5.10	N/A
10°C	5.84	5.64	5.45	5.29	5.24	5.19	5.13	5.08	N/A
15°C	5.55	5.42	5.30	5.20	5.16	5.13	5.09	5.06	N/A
20°C	5.27	5.21	5.15	5.10	5.08	5.07	5.05	5.03	N/A
25°C	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	N/A
30°C	4.75	4.79	4.85	4.89	4.91	4.93	4.95	4.97	N/A
35°C	4.51	4.60	4.69	4.78	4.82	4.85	4.90	4.93	N/A
40°C	4.29	4.41	4.54	4.67	4.72	4.77	4.84	4.89	N/A
45°C	4.08	4.22	4.39	4.56	4.62	4.69	4.78	4.85	N/A
50°C	3.90	4.05	4.24	4.44	4.52	4.61	4.72	4.81	N/A
55°C	3.72	3.89	4.10	4.33	4.42	4.52	4.65	4.76	N/A
60°C	3.56	3.73	3.96	4.21	4.32	4.43	4.59	4.71	N/A
65°C	3.41	3.59	3.83	4.10	4.21	4.34	4.52	4.66	N/A
70°C	3.28	3.46	3.70	3.99	4.11	4.25	4.44	4.61	N/A
75°C	3.15	3.33	3.58	3.88	4.01	4.15	4.37	4.55	N/A
80°C	3.04	3.22	3.47	3.77	3.91	4.06	4.30	4.49	N/A
85°C	2.94	3.11	3.36	3.67	3.81	3.97	4.22	4.43	N/A
90°C	2.84	3.01	3.26	3.57	3.71	3.88	4.14	4.37	N/A
95°C	2.76	2.92	3.16	3.47	3.62	3.79	4.07	4.31	N/A
100°C	2.68	2.84	3.07	3.38	3.53	3.71	3.99	4.25	N/A

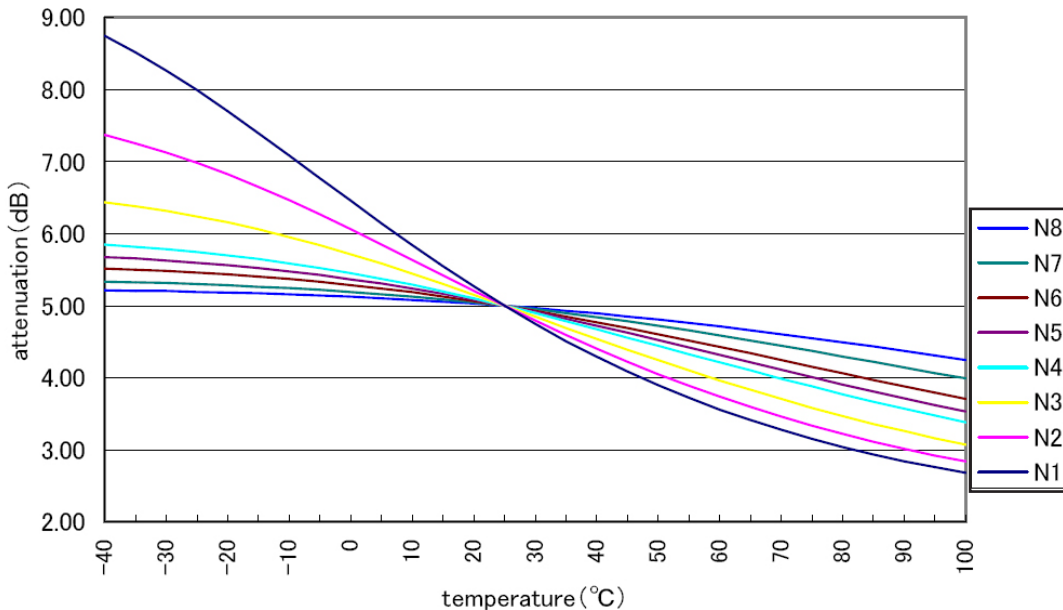

impossible made simple

Ver 3 11/2011 Specifications Subject to Change Without Notice

AV-0805

Features

Thin Film Technology

9 Different Temperature Characteristics

Attenuation from 1dB to 10dB in 1dB increments

1.3:1 Nominal VSWR

ims International Manufacturing Services, Inc.

Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>