

AV-0805

AV-0805-C-10DBNx

Temperature	N1	N2	N3	N4	N5	N6	N7	N8	N9
-40°C	15.5	14.0	12.8	11.7	11.0	10.7	10.5	10.3	N/A
-35°C	15.2	13.8	12.7	11.6	11.0	10.7	10.4	10.3	N/A
-30°C	14.9	13.6	12.6	11.5	10.9	10.6	10.4	10.3	N/A
-25°C	14.5	13.3	12.4	11.5	10.9	10.6	10.4	10.3	N/A
-20°C	14.2	13.1	12.2	11.4	10.9	10.6	10.4	10.3	N/A
-15°C	13.7	12.8	12.1	11.3	10.8	10.5	10.4	10.2	N/A
-10°C	13.3	12.5	11.9	11.2	10.7	10.5	10.3	10.2	N/A
-5°C	12.8	12.2	11.6	11.0	10.7	10.4	10.3	10.2	N/A
0°C	12.4	11.8	11.4	10.9	10.6	10.4	10.3	10.2	N/A
5°C	11.9	11.5	11.1	10.7	10.5	10.3	10.2	10.1	N/A
10°C	11.4	11.1	10.9	10.6	10.4	10.3	10.2	10.1	N/A
15°C	10.9	10.8	10.6	10.4	10.3	10.2	10.1	10.1	N/A
20°C	10.5	10.4	10.3	10.2	10.1	10.1	10.1	10.0	N/A
25°C	10.0	10.0	10.0	10.0	10.0	10.0	10.0	10.0	N/A
30°C	9.6	9.6	9.7	9.8	9.9	9.9	9.9	10.0	N/A
35°C	9.1	9.3	9.4	9.6	9.7	9.8	9.9	9.9	N/A
40°C	8.7	8.9	9.1	9.3	9.6	9.7	9.8	9.8	N/A
45°C	8.3	8.5	8.8	9.1	9.4	9.6	9.7	9.8	N/A
50°C	8.0	8.2	8.5	8.9	9.2	9.4	9.6	9.7	N/A
55°C	7.6	7.9	8.2	8.7	9.0	9.3	9.5	9.6	N/A
60°C	7.3	7.6	7.9	8.4	8.9	9.2	9.4	9.6	N/A
65°C	7.0	7.3	7.6	8.2	8.7	9.0	9.3	9.5	N/A
70°C	6.7	7.0	7.4	8.0	8.5	8.9	9.2	9.4	N/A
75°C	6.4	6.7	7.1	7.7	8.3	8.7	9.1	9.3	N/A
80°C	6.1	6.5	6.9	7.5	8.1	8.6	8.9	9.2	N/A
85°C	5.9	6.2	6.6	7.3	7.9	8.4	8.8	9.1	N/A
90°C	5.7	6.0	6.4	7.1	7.7	8.2	8.7	9.0	N/A
95°C	5.5	5.8	6.2	6.9	7.6	8.1	8.5	8.9	N/A
100°C	5.3	5.6	6.0	6.7	7.4	7.9	8.4	8.8	N/A

Features

Thin Film Technology


9 Different Temperature Characteristics

Attenuation from 1dB to 10dB in 1dB increments

1.3:1 Nominal VSWR



Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>

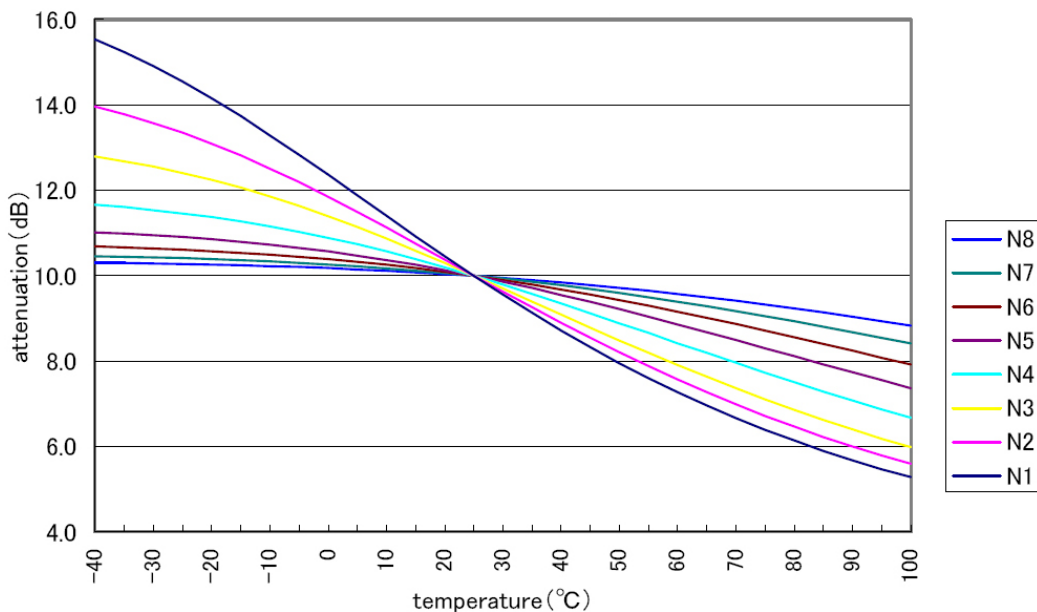

impossible made simple