

AV-0805

AV-0805-C-02DBNx

Temperature	N1	N2	N3	N4	N5	N6	N7	N8	N9
-40°C	2.50	2.34	2.26	2.18	2.11	2.09	2.07	2.05	2.03
-35°C	2.48	2.33	2.25	2.17	2.11	2.09	2.07	2.05	2.03
-30°C	2.46	2.31	2.24	2.17	2.11	2.09	2.07	2.05	2.03
-25°C	2.43	2.30	2.23	2.16	2.10	2.08	2.07	2.04	2.03
-20°C	2.40	2.28	2.21	2.15	2.10	2.08	2.06	2.04	2.03
-15°C	2.37	2.26	2.20	2.14	2.09	2.07	2.06	2.04	2.03
-10°C	2.33	2.23	2.18	2.13	2.08	2.07	2.05	2.04	2.02
-5°C	2.30	2.21	2.16	2.11	2.07	2.06	2.05	2.03	2.02
0°C	2.25	2.18	2.14	2.10	2.07	2.05	2.04	2.03	2.02
5°C	2.21	2.15	2.12	2.08	2.05	2.05	2.04	2.02	2.02
10°C	2.16	2.11	2.09	2.06	2.04	2.04	2.03	2.02	2.01
15°C	2.11	2.08	2.06	2.04	2.03	2.02	2.02	2.01	2.01
20°C	2.05	2.04	2.03	2.02	2.02	2.01	2.01	2.01	2.00
25°C	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00	2.00
30°C	1.95	1.96	1.97	1.98	1.98	1.99	1.99	1.99	1.99
35°C	1.89	1.92	1.93	1.95	1.96	1.97	1.98	1.98	1.99
40°C	1.84	1.87	1.90	1.92	1.95	1.95	1.96	1.97	1.98
45°C	1.78	1.83	1.86	1.89	1.92	1.94	1.95	1.96	1.98
50°C	1.73	1.79	1.82	1.86	1.90	1.92	1.93	1.95	1.97
55°C	1.68	1.74	1.78	1.83	1.88	1.90	1.92	1.94	1.96
60°C	1.63	1.70	1.75	1.80	1.86	1.88	1.90	1.93	1.95
65°C	1.58	1.66	1.71	1.77	1.83	1.86	1.88	1.92	1.94
70°C	1.54	1.62	1.67	1.74	1.81	1.83	1.86	1.90	1.93
75°C	1.50	1.58	1.63	1.71	1.78	1.81	1.84	1.89	1.92
80°C	1.46	1.54	1.60	1.67	1.76	1.79	1.82	1.87	1.91
85°C	1.42	1.50	1.56	1.64	1.73	1.76	1.80	1.86	1.90
90°C	1.38	1.46	1.53	1.61	1.70	1.74	1.78	1.84	1.89
95°C	1.35	1.43	1.49	1.58	1.67	1.72	1.76	1.83	1.88
100°C	1.32	1.40	1.46	1.55	1.65	1.69	1.74	1.81	1.86


Features

Thin Film Technology

9 Different Temperature Characteristics

Attenuation from 1dB to 10dB in 1dB increments

1.3:1 Nominal VSWR

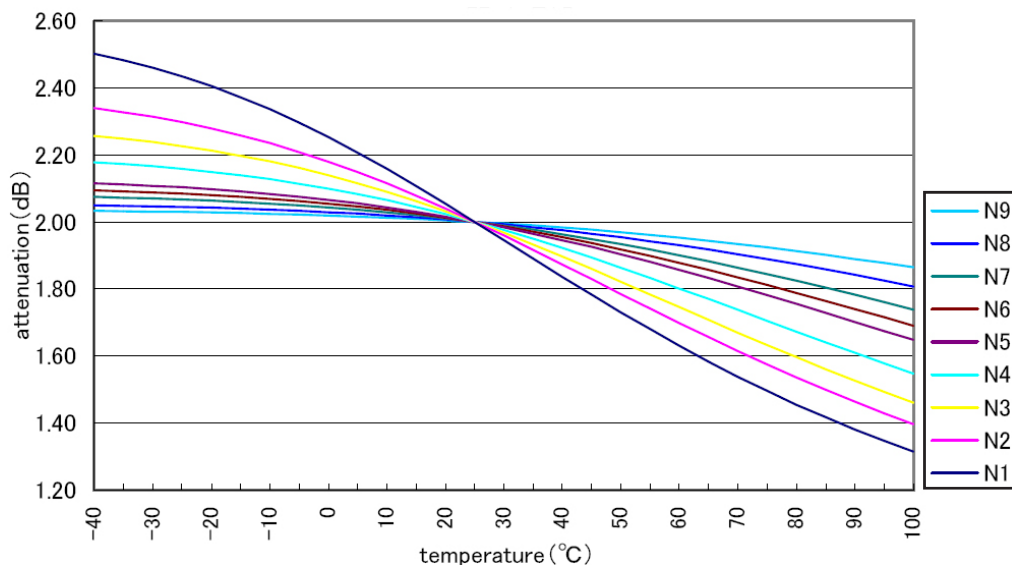

ims International Manufacturing Services, Inc.

Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>

impossible made simple