


AV-0805-C-03DBNx

Temperature	N1	N2	N3	N4	N5	N6	N7	N8	N9
-40°C	4.42	3.88	3.64	3.43	3.27	3.22	3.17	3.11	3.07
-35°C	4.35	3.85	3.62	3.42	3.26	3.21	3.17	3.11	3.07
-30°C	4.27	3.81	3.59	3.40	3.25	3.21	3.16	3.11	3.07
-25°C	4.19	3.76	3.56	3.38	3.24	3.20	3.15	3.10	3.07
-20°C	4.09	3.71	3.52	3.36	3.23	3.19	3.15	3.10	3.06
-15°C	3.99	3.65	3.48	3.33	3.21	3.17	3.14	3.09	3.06
-10°C	3.87	3.58	3.44	3.30	3.19	3.16	3.13	3.08	3.05
-5°C	3/76	3.51	3.39	3.27	3.17	3.14	3.11	3.08	3.05
0°C	3.63	3.44	3.33	3.23	3.15	3.12	3.10	3.07	3.04
5°C	3.51	3.35	3.27	3.19	3.13	3.10	3.08	3.06	3.04
10°C	3.38	3.27	3.21	3.15	3.10	3.08	3.06	3.04	3.03
15°C	3.25	3.18	3.14	3.10	3.07	3.06	3.05	3.03	3.02
20°C	3.12	3.09	3.07	3.05	3.04	3.03	3.02	3.02	3.01
25°C	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00	3.00
30°C	2.88	2.91	2.93	2.94	2.96	2.97	2.97	2.98	2.99
35°C	2.76	2.82	2.85	2.89	2.92	2.93	2.95	2.96	2.98
40°C	2.65	2.73	2.77	2.83	2.88	2.90	2.92	2.94	2.96
45°C	2.55	2.64	2.70	2.77	2.84	2.86	2.89	2.92	2.95
50°C	2.45	2.55	2.62	2.71	2.79	2.82	2.85	2.90	2.93
55°C	2.35	2.47	2.55	2.64	2.74	2.78	2.82	2.87	2.91
60°C	2.27	2.39	2.48	2.58	2.69	2.74	2.78	2.85	2.89
65°C	2.19	2.31	2.41	2.52	2.64	2.69	2.75	2.82	2.87
70°C	2.11	2.24	2.34	2.46	2.59	2.65	2.71	2.79	2.85
75°C	2.04	2.17	2.27	2.40	2.54	2.60	2.67	2.76	2.83
80°C	1.98	2.11	2.21	2.34	2.49	2.56	2.63	2.73	2.81
85°C	1.92	2.05	2.15	2.29	2.44	2.51	2.59	2.70	2.79
90°C	1.87	1.99	2.09	2.23	2.39	2.47	2.55	2.66	2.76
95°C	1.82	1.94	2.04	2.18	2.35	2.42	2.50	2.63	2.73
100°C	1.77	1.89	1.99	2.13	2.30	2.37	2.46	2.60	2.71

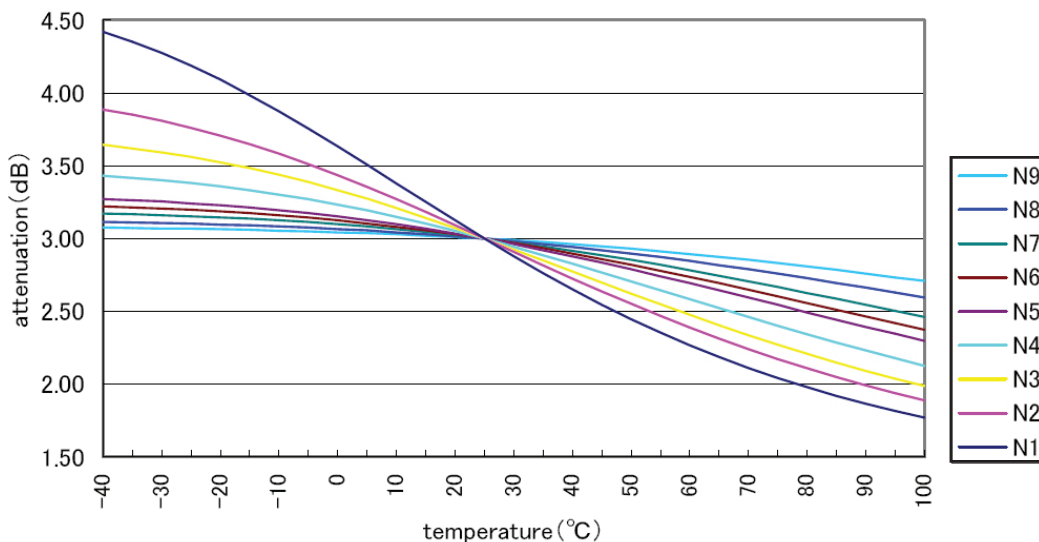

AV-0805

Features

Thin Film Technology

9 Different Temperature Characteristics

Attenuation from 1dB to 10dB in 1dB increments

1.3:1 Nominal VSWR

ims International Manufacturing Services, Inc.

Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>

impossible made simple