

AV-0805

AV-0805-C-04DBNx

Temperature	N1	N2	N3	N4	N5	N6	N7	N8	N9
-40°C	7.48	5.88	5.30	4.84	4.51	4.41	4.32	4.21	N/A
-35°C	7.25	5.79	5.25	4.81	4.50	4.40	4.31	4.20	N/A
-30°C	6.99	5/69	5.18	4.77	4.48	4.38	4.30	4.20	N/A
-25°C	6.72	5.58	5.11	4.73	4.45	4.37	4.28	4.19	N/A
-20°C	6.44	5.45	5.03	4.68	4.43	4.35	4.27	4.18	N/A
-15°C	6.15	5.31	4.95	4.63	4.40	4.32	4.25	4.17	N/A
-10°C	5.86	5.16	4.85	4.57	4.36	4.29	4.23	4.15	N/A
-5°C	5.56	5.01	4.74	4.51	4.32	4.26	4.21	4.14	N/A
0°C	5.28	4.84	4.63	4.43	4.28	4.23	4.18	4.12	N/A
5°C	5.00	4.68	4.51	4.36	4.23	4.19	4.15	4.10	N/A
10°C	4.73	4.51	4.39	4.27	4.18	4.15	4.12	4.08	N/A
15°C	4.47	4.34	4.26	4.19	4.12	4.10	4.08	4.05	N/A
20°C	4.23	4.17	4.13	4.10	4.06	4.05	4.04	4.03	N/A
25°C	4.00	4.00	4.00	4.00	4.00	4.00	4.00	4.00	N/A
30°C	3.79	3.84	3.87	3.90	3.93	3.94	3.95	3.97	N/A
35°C	3.59	3.68	3.74	3.80	3.86	3.88	3.91	3.94	N/A
40°C	3.41	3.53	3.61	3.70	3.79	3.82	3.85	3.90	N/A
45°C	3.24	3.39	3.48	3.60	3.71	3.76	3.80	3.86	N/A
50°C	3.09	3.25	3.36	3.50	3.64	3.69	3.74	3.82	N/A
55°C	2.95	3.12	3.25	3.40	3.56	3.62	3.69	3.78	N/A
60°C	2.83	3.01	3.14	3.30	3.48	3.55	3.63	3.73	N/A
65°C	2.71	2.89	3.03	3.20	3.40	3.48	3.56	3.68	N/A
70°C	2.61	2.79	2.93	3.11	3.32	3.41	3.50	3.64	N/A
75°C	2.52	2.69	2.83	3.02	3.24	3.33	3.44	3.59	N/A
80°C	2.43	2.60	2.74	2.94	3.16	3.26	3.37	3.53	N/A
85°C	2.35	2.52	2.66	2.85	3.09	3.19	3.31	3.48	N/A
90°C	2.28	2.45	2.58	2.78	3.01	3.12	3.24	3.43	N/A
95°C	2.22	2.38	2.51	2.70	2.94	3.05	3.18	3.37	N/A
100°C	2.16	2.31	2.44	2.63	2.87	2.98	3.12	3.32	N/A

Features

Thin Film Technology


9 Different Temperature Characteristics

Attenuation from 1dB to 10dB in 1dB increments

1.3:1 Nominal VSWR



Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>

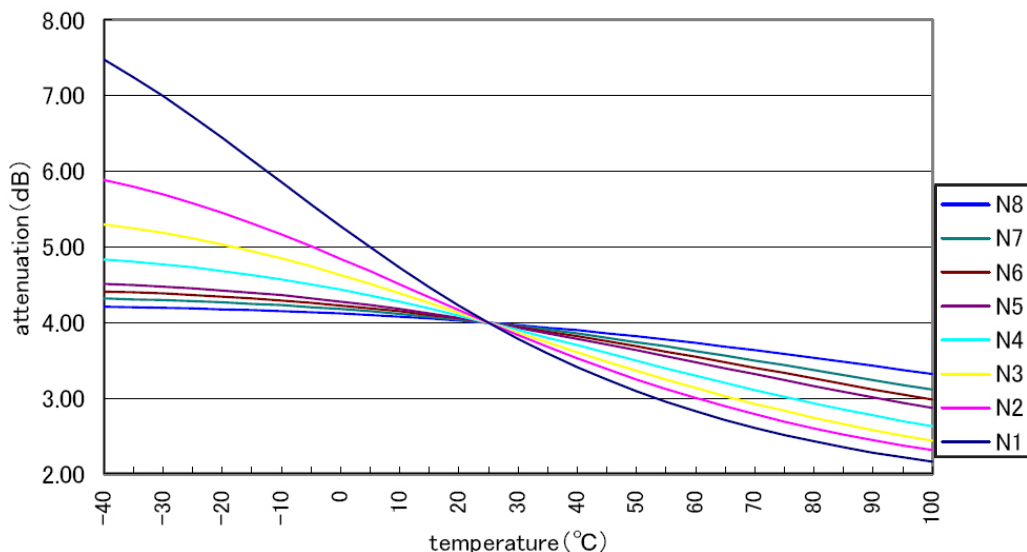

impossible made simple