

AV-0805-C-09DBNx

Temperature	N1	N2	N3	N4	N5	N6	N7	N8	N9
-40°C	12.9	11.9	11.1	10.3	9.8	9.5	9.4	9.24	N/A
-35°C	12.7	11.8	11.0	10.2	9.8	9.5	9.3	9.23	N/A
-30°C	12.5	11.6	10.9	10.2	9.7	9.5	9.3	9.22	N/A
-25°C	12.3	11.5	10.8	10.1	9.7	9.5	9.3	9.22	N/A
-20°C	12.0	11.3	10.7	10.1	9.7	9.5	9.3	9.20	N/A
-15°C	11.8	11.1	10.6	10.0	9.6	9.4	9.3	9.19	N/A
-10°C	11.4	10.9	10.4	9.9	9.6	9.4	9.3	9.18	N/A
-5°C	11.1	10.7	10.3	9.8	9.5	9.3	9.2	9.16	N/A
0°C	10.8	10.4	10.1	9.7	9.4	9.3	9.2	9.14	N/A
5°C	10.4	10.2	9.9	9.6	9.4	9.3	9.2	9.12	N/A
10°C	10.1	9.9	9.7	9.4	9.3	9.2	9.1	9.09	N/A
15°C	9.7	9.6	9.5	9.3	9.2	9.1	9.1	9.07	N/A
20°C	9.4	9.3	9.2	9.2	9.1	9.1	9.1	9.03	N/A
25°C	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.00	N/A
30°C	8.6	8.7	8.8	8.8	8.9	8.9	8.9	8.96	N/A
35°C	8.3	8.4	8.5	8.7	8.8	8.8	8.9	8.92	N/A
40°C	8.0	8.1	8.3	8.5	8.6	8.7	8.8	8.88	N/A
45°C	7.6	7.8	8.0	8.3	8.5	8.6	8.8	8.83	N/A
50°C	7.3	7.5	7.8	8.1	8.4	8.5	8.7	8.78	N/A
55°C	7.0	7.3	7.5	7.9	8.2	8.4	8.6	8.72	N/A
60°C	6.7	7.0	7.3	7.7	8.1	8.3	8.5	8.66	N/A
65°C	6.5	6.7	7.0	7.5	7.9	8.2	8.4	8.60	N/A
70°C	6.2	6.5	6.8	7.3	7.8	8.1	8.3	8.53	N/A
75°C	6.0	6.3	6.6	7.1	7.6	8.0	8.2	8.46	N/A
80°C	5.7	6.0	6.4	6.9	7.5	7.8	8.1	8.39	N/A
85°C	5.5	5.8	6.2	6.8	7.3	7.7	8.0	8.31	N/A
90°C	5.3	5.6	6.0	6.6	7.1	7.6	7.9	8.23	N/A
95°C	5.1	5.4	5.8	6.4	7.0	7.4	7.8	8.14	N/A
100°C	5.0	5.3	5.6	6.2	6.8	7.3	7.7	8.06	N/A

AV-0805


Features

Thin Film Technology

9 Different Temperature Characteristics

Attenuation from 1dB to 10dB in 1dB increments

1.3:1 Nominal VSWR

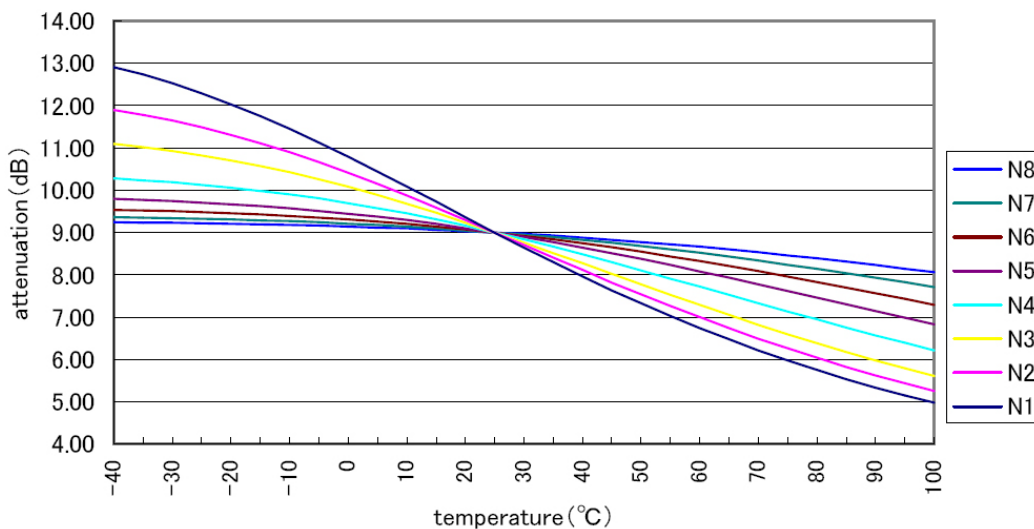

impossible made simple

ims International
Manufacturing
Services, Inc.

Tel (401) 683-9700
Fax (401) 683-5571
e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>