

0402S 0603S

0805S 1206S

Super RCX

2010S 2512S

Thick Film Wraparound Extended Power Surface Mount Chip Resistors for Epoxy and Solder Mount

The *ims* Super (S) RCX series of thick film wraparound surface mount chip resistors is ideal for applications requiring epoxy or solder die attaching methods and extended power handling in a small package. Thick film technology provides a stable resistor at a very affordable price. Special processing allows for **twice** the power handling capacity of other resistors in the same size package. The "X" designation in each series is a variable that allows for specifying the termination metalization. Please see the ordering information on the back for instructions. The wraparound terminations can be platinum silver or platinum silver with solder coating. These chip resistors have the following features:

- **Twice** the power handling capability of other resistors in the same form factor
- High stability thick film resistor element
- 96% Al₂O₃ substrate material
- Platinum silver (PtAg) or platinum silver with 62/36/2 solder coating
- Tolerances to ± 1%
- Passivated resistor element is standard
- Available in bulk, tape and reel, and waffle pack



Features

Twice the power handling of similar resistors

Thick film technology

Full Wraparound Terminations

Ideal for epoxy attachment. Solder coating also available


Resistance values from 10 ohm to 1 Megohm

Tolerances to 1 %


TCR 100 ppm/°C typical

Termination style

Full wraparound



Resistance values

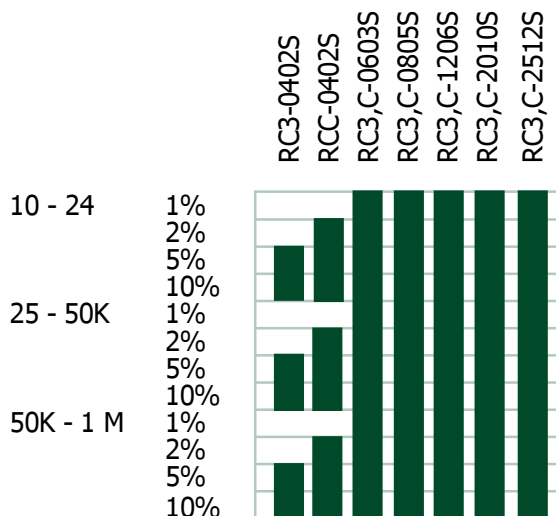

ims International Manufacturing Services, Inc.
 50 Schoolhouse Lane
 Portsmouth, RI 02871
 Tel (401) 683-9700
 Fax (401) 683-5571
 e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>

Consult factory for additional values and tolerances.

Dimensions

Part Number	Length	Width	Height	Terminal
RCX-0402S	0.040 ± .005	0.020 ± .005	0.020 max.	0.008 ± .004
RCX-0603S	0.060 ± .005	0.030 ± .005	0.020 max.	0.014 ± .006
RCX-0805S	0.080 ± .005	0.050 ± .005	0.020 max.	0.018 ± .008
RCX-1206S	0.126 ± .008	0.063 ± .006	0.020 max.	0.020 ± .010
RCX-2010S	0.197 ± .008	0.106 ± .008	0.028 max.	0.020 ± .012
RCX-2512S	0.248 ± .008	0.126 ± .010	0.028 max.	0.026 ± .010

*SG (single top contact with wraparound groundplane) terminations available on all sizes as special order. Contact factory for details.

Specifications

Operating temperature	-55°C to +150°C
Maximum Working Voltage	
RCX-0402S to RCX-0603S	50 VDC
RCX-0805S	150 VDC
RCX-1206S to RCX 2512S	200VDC
Rated power (70°C)*	
RCX-0402S	160 mW
RCX-0603S	200 mW
RCX-0805S	350 mW
RCX-1206S	500 mW
RCX-2010S	1 W
RCX-2512S	2 W
Resistance tolerances	
RCX-0402S	2%, 5%, 10%
RCX-0603S to RCX-2512S	1%, 2%, 5%, 10%


*Note 1: Power Ratings based upon free air testing.

Note 2: Power handling can be extended further using proper thermal management techniques.

Ordering Information

Example: 100 , 5%, 0402, PtAg terminations, 160mW resistor

RC3 - 0402S-1000 J		Tolerance
RC		F - 1% G - 2%
		J - 5% K - 10%
3 PtAg		
C PtAg with 62/36/2 solder coating		
Form factor		Resistance value
0402S	0603S	The first three digits are significant values. The fourth is the number of zeroes following. The R indicates a decimal point when resistance value is less than 100Ω.
0805S	1206S	
2010S	2512S	

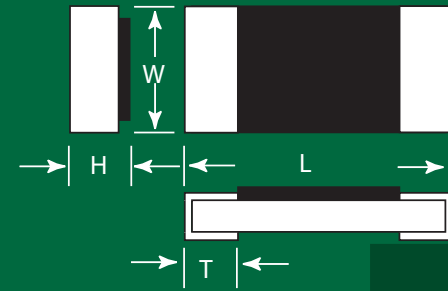

**For Higher Power
Please see our
N-Series Resistors**

**Ask Us
About
Engineering
Kits!**

**Visit us on
the Web -
[http://
www.ims-
resistors.com](http://www.ims-resistors.com)**

**ims International
Manufacturing
Services, Inc.**

50 Schoolhouse Lane
Portsmouth, RI 02871
Tel (401) 683-9700
Fax (401) 683-5571
e-mail: ims@ims-resistors.com
<http://www.ims-resistors.com>