

IMK2549-30DB

0.120" x 0.120" RESISTIVE COUPLER - 30DB


INSERTION LOSS (includes fixture loss)

-30 DB DUT

16 Jun 2010 12:45:29

CH1 S11 LOG 10 dB/REF 0 dB

1: -29.259 dB .050 000 000 GHz

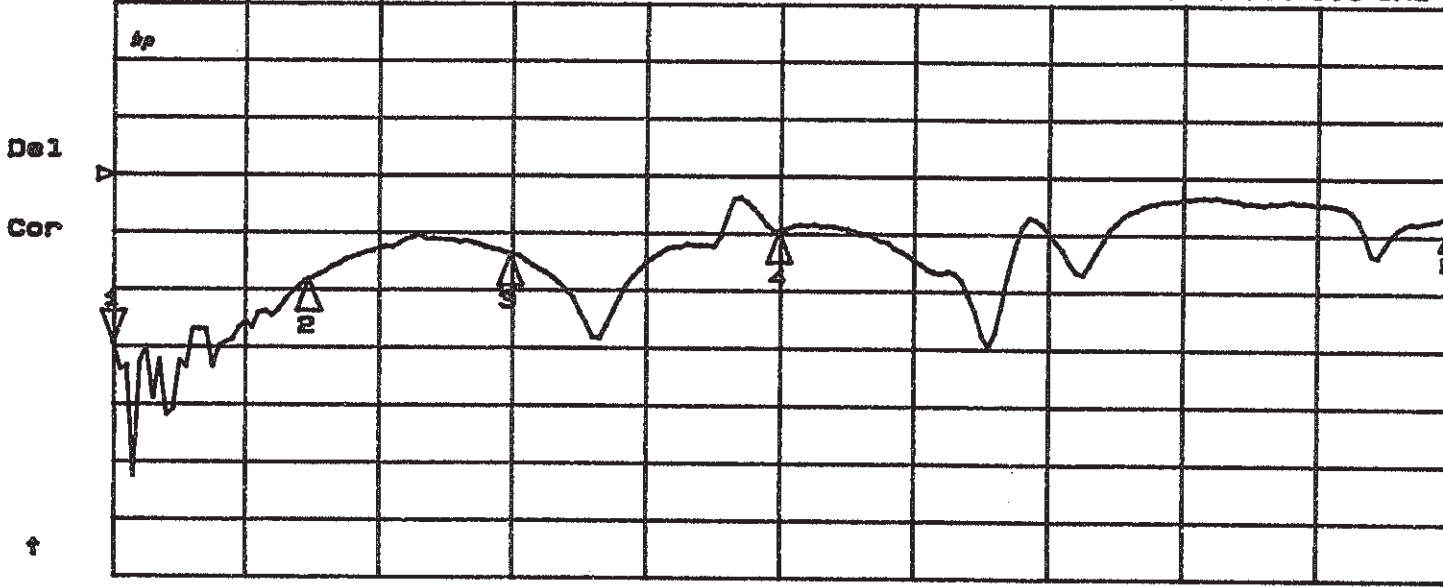


VSWR-1N

CH1 Markers

- 1: -18.058 dB 3.00000 GHz
- 2: -13.618 dB 6.00000 GHz
- 3: -9.4750 dB 10.00000 GHz
- 4: -6.7730 dB 20.00000 GHz

CH2 S21 LOG 10 dB/REF 0 dB

1: -26.700 dB .050 000 000 GHz

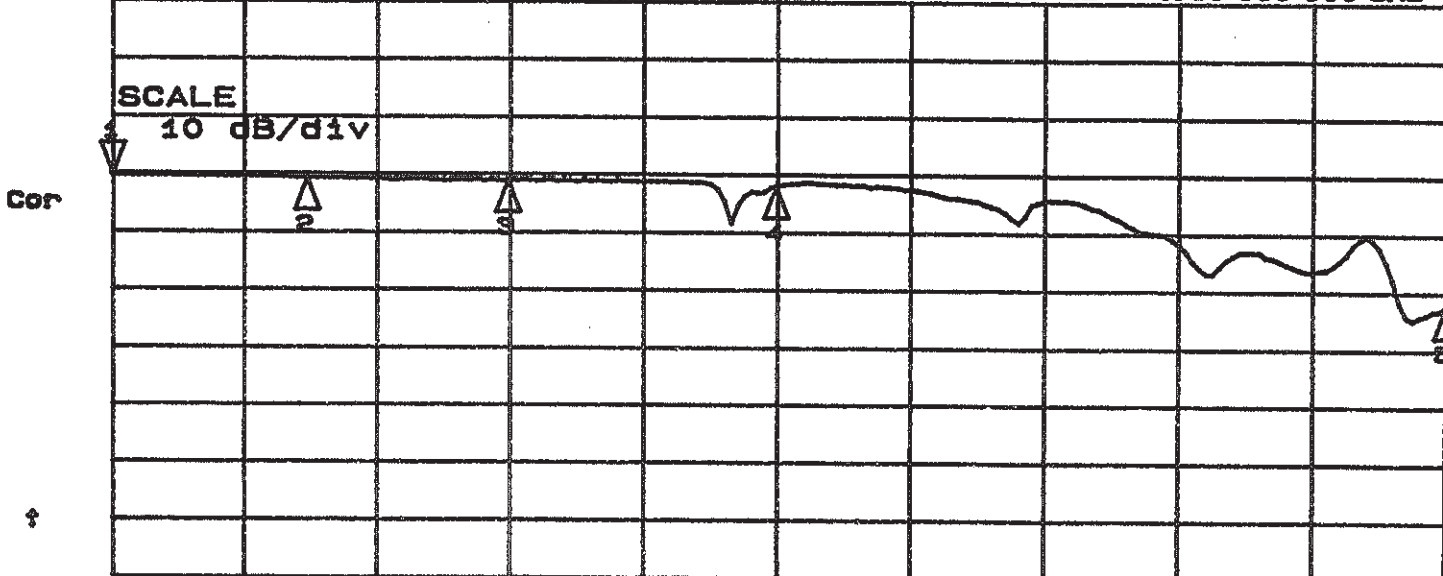

1. L. THROUGH PORT-2

CH2 Markers

- 1: -1.64500 dB 3.00000 GHz
- 2: -1.96400 dB 6.00000 GHz
- 3: -2.0000 dB 10.00000 GHz
- 4: -22.357 dB 20.00000 GHz

START .050 000 000 GHz

STOP 20.000 000 000 GHz

Engineering Specialties Service
 680 North Bedford Street, 2nd Floor
 East Bridgewater, MA, 02333
 Tel: 508-378-1112 Fax: 508-378-2410
 www.engineeringspecialties.net

Company: IMS 6-14-2010
 Part Number: IMK2549
 Job number: J10-3880 PO# 12627
 Description: 'R' 3 port divider
 Test 50m-8ghz. VSWR, Loss, Isolation
 1/26

